

ELKA HOUSINGS

MADE OF ALUMINIUM









Aluminium-housings PKW 1200

The high-quality aluminum housing offers plenty of space for additional installations, optional modern lighting and makes on-site installation easier in a completely new way. A flexible concept with modular design and clear cable management.





Comfortable


- ✓ Simple cable management via clips, which can be repositioned variably on the corner profiles without tools
- ✓ One-hand locking of the removable cover
- Mounting plate can be variably positioned on the corner profiles on site

Additional installations

- ✓ Plenty of space for additional fittings (assembly dimensions per PKW housing (W x D x H) 250 x 400 x 450 mm)
- ✓ Installation through removable front panel (lockable), lateral access door (lockable) or removable hood
- Optional installation service for ELKA products, as well as for provided accessories



Aluminium-housings PKW/LKW 2400

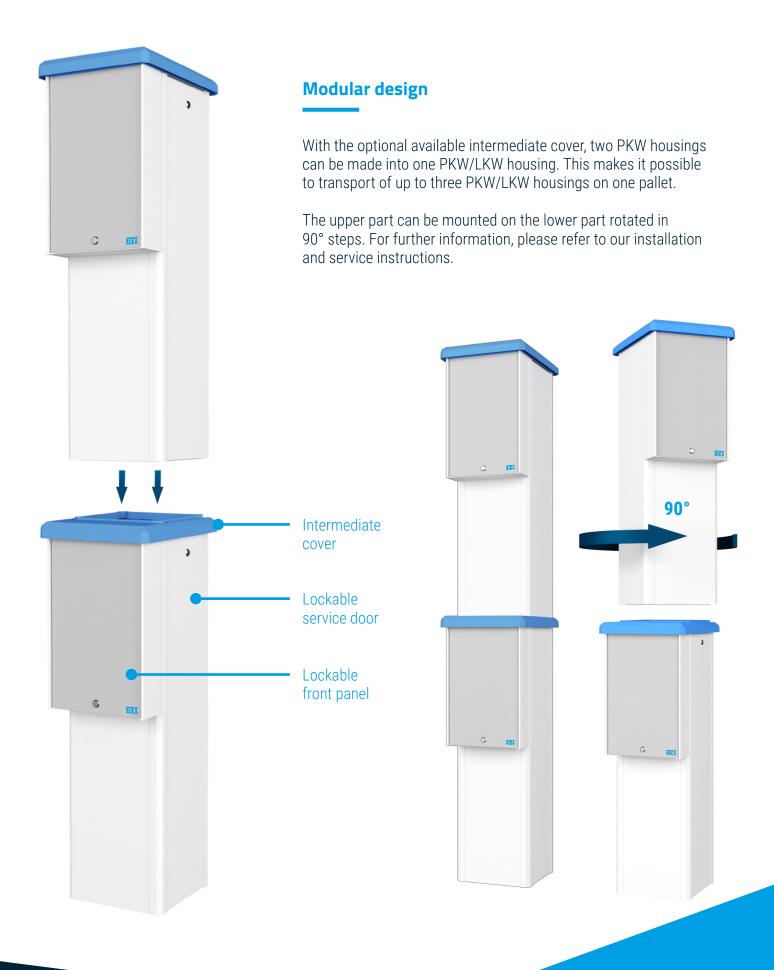



Service door

- ✓ The position of the door can be optionally determined when ordering (for the PKW/LKW housing, the door of the upper part cannot be placed above the front panel of the lower part)
- ✓ Standard on the left side (view from the front)



LED lighting

- ✔ Optional LED lighting with low power consumption
- ✓ Lighting in warm white, cool white or RGB (red / green / blue) possible



Custom colors

- ✓ Optionally available in all RAL custom colors
- ✓ Standard colors: Housing RAL-9010 (white) /
 Hood RAL-5012 (blue) / Front panel RAL-7035 (light gray)




Convenient shipping


✓ Up to six PKW housings or up to three PKW/LKW housings stackable on one EURO pallet








| Technical data | Aluminium-housing PKW 1200 | Aluminium-housing PKW/LKW 2400 |
|------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------|--------------------------------|
| Dimensions max. (W x D x H) in mm | 379 x 486 x 1,200 | 379 x 486 x 2,386 |
| Assembly dimensions (W x D x H) in mm | 250 x 400 x 450 | each 250 x 400 x 450 |
| Weight in kg | 30.5 | 60 |
| Service door | Standard on the left side (view from the front) | |
| Degree of protection | IP 54 | |
| Material | Housing: aluminium, powder-coated Base plate: steel, hot-dip galvanized | |
| Colours | Housing RAL-9010 (white) / Cover RAL-5012 (blue) / Front plate RAL-7035 (light grey), optionally available in all RAL custom colors | |
| Accessories (optional) | LED lighting under the hood, clips for variable cable routing, power supply | |

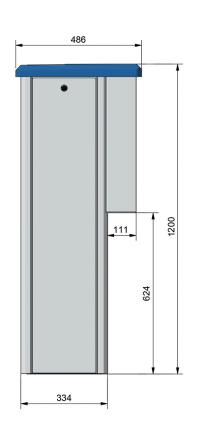


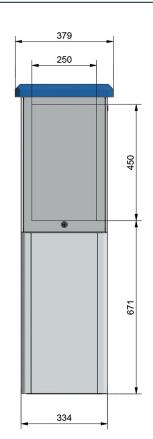




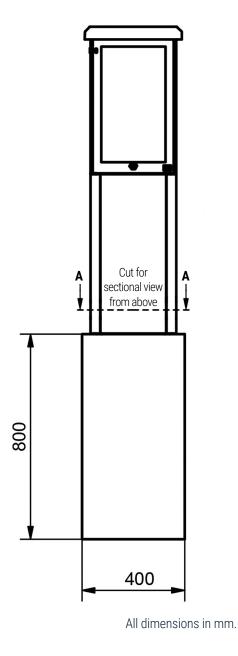

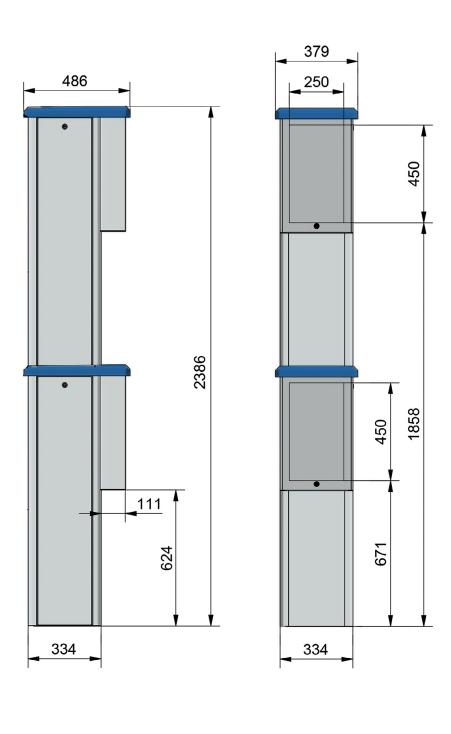

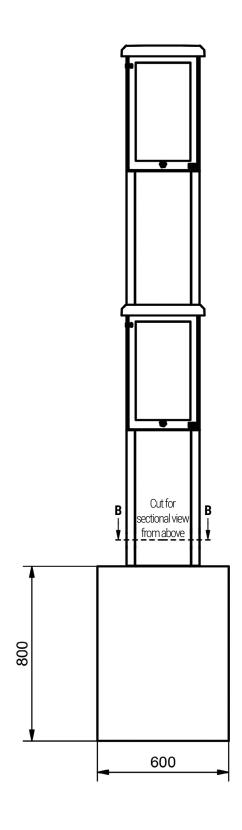





ELKA-Torantriebe GmbH u. Co. Betriebs KG Dithmarscher Str. 9, 25832 Tönning / Germany

☑ info@elka.eu

49(0)4861-9690-0

www.elka.eu

+49(0)4861-9690-90